Cofferguard

PRODUCT SPECIFICATION

CG-410A

Full-size roller cash drawer

Four tray layouts in one full-size enclosure — built in our own factory for POS programs.

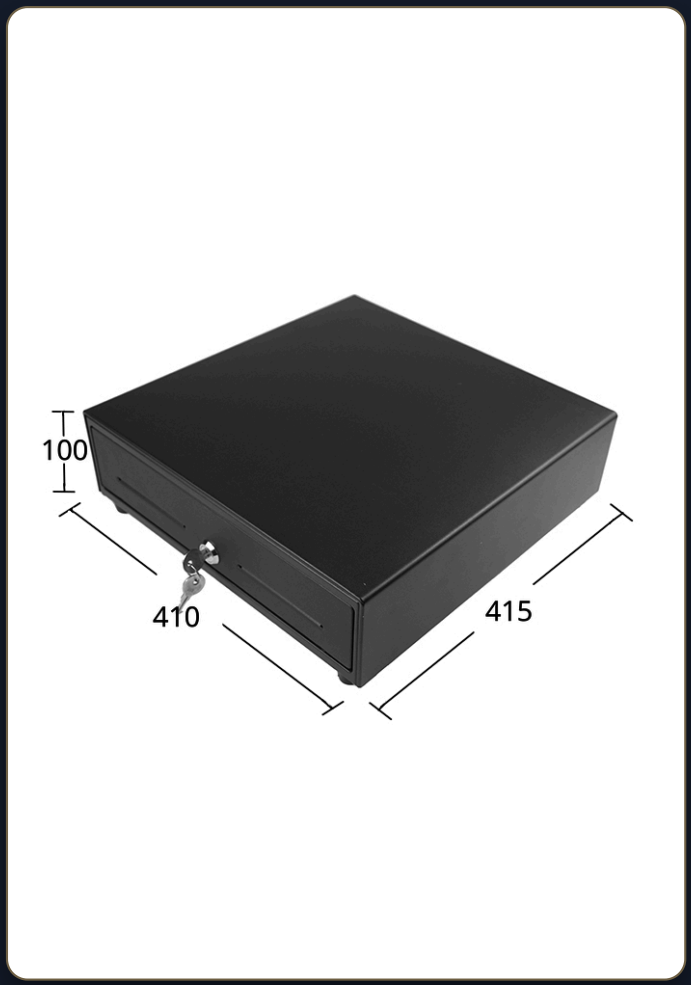

KEY SPECIFICATIONS

OUTER	**410 × 415 × 100 mm** (16.1 × 16.3 × 3.9 in)
PACKAGE	**470 × 495 × 165 mm** (18.5 × 19.5 × 6.5 in)
NET WEIGHT	**6.8–6.9 kg** (15.0–15.2 lb) varies by layout
GROSS WEIGHT	**7.4–7.5 kg** (16.3–16.5 lb) varies by layout
VOLTAGE	**9 / 12 / 24 V (default 12)**
INTERFACE	**RJ11 / RJ12**
CONNECTOR	**6P4C / 6P6C**
CABLE	**1 m** (3.3 ft)
LOCK	**3-position**
MEDIA SLOT	**Dual media slot**

WORKING PARAMETERS

SOLENOID	0837L-12 (11Ω ±10%)	PULSE	12 VDC ±10%, 100–200 ms
PEAK CURRENT	≤ 1.5 A	LOCK	502, 200 different key numbers
POSITIONS	Key left 60° open, right 90° lock, centre = pulse opens		
LIFETIME	≥ 1,000,000 open/close cycles	COLOUR	Black (PT1.4C)
CABLE	6P4C, 1 m (3.3 ft), 4-PIN, bottom pluggable		

Why Coffer Guard

OEM & ODM customization, backed by an owned factory.

Color
Customer-specified enclosure color

Logo
Silk-print or stamped mark

Packaging
Customer-branded cartons and marks

Voltage
9 / 12 / 24 V options

Interface
RJ11 / RJ12 / USB

Tray layouts
Bill and coin arrangements

Lock
Lock type and key options

Factory
Owned factory — development through production

CE · 2014/30/EU | FCC Part 15 | ISO 9001:2015 *certificate copies on request*

info@cofferguard.com · WhatsApp +86 152 9881 9179 · Suzhou, Jiangsu, China · cofferguard.com

Cofferguard

PRODUCT SPECIFICATION

TRAY LAYOUTS

CG-410A · four configurations in one 410 × 415 × 100 mm enclosure

4B5C

4 bill · 5 coin

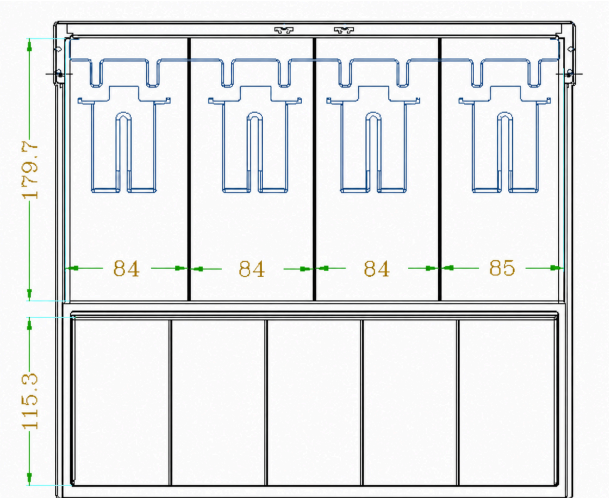

84 / 84 / 84 / 85 mm bill bays
1 × 5 coin wells · 6.8 kg net · 7.4 kg gross

4B8C

4 bill · 8 coin

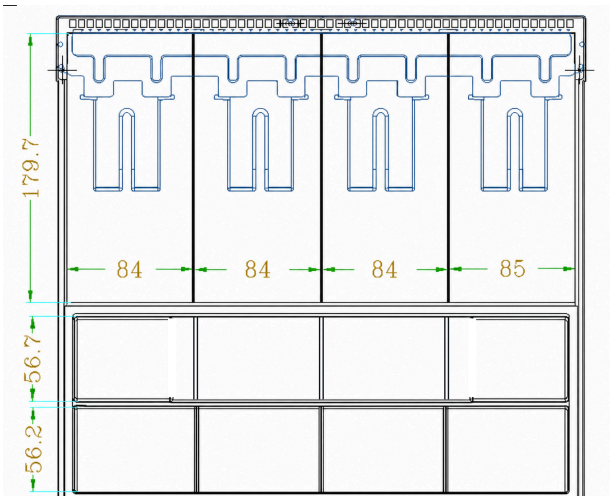

84 / 84 / 84 / 85 mm bill bays
2 × 4 coin wells · 6.8 kg net · 7.4 kg gross

5B5C

5 bill · 5 coin

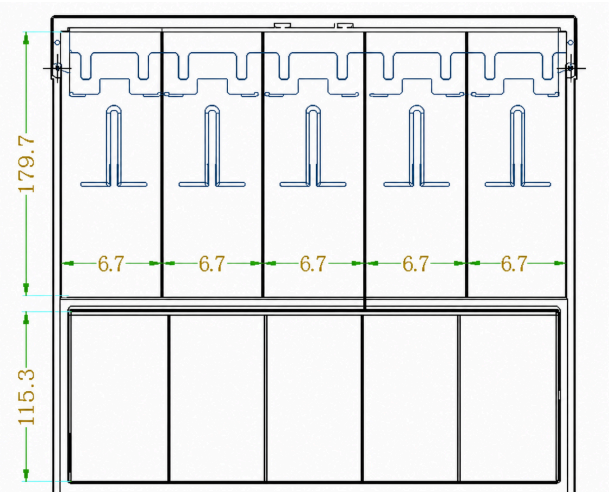

5 × 67 mm bill bays
1 × 5 coin wells · 6.9 kg net · 7.5 kg gross

5B8C

5 bill · 8 coin

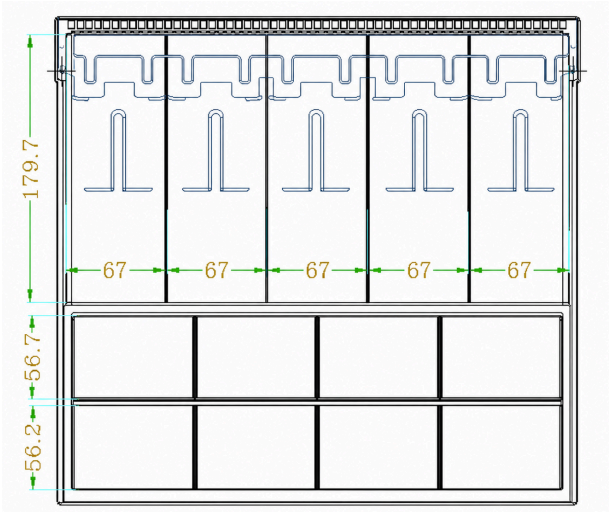

5 × 67 mm bill bays
2 × 4 coin wells · 6.9 kg net · 7.5 kg gross